


HIGH FIDELITY MASTER-REMOTE AMPLIFIER, TYPE MRA4-L6

V7 & V8
6 L 6

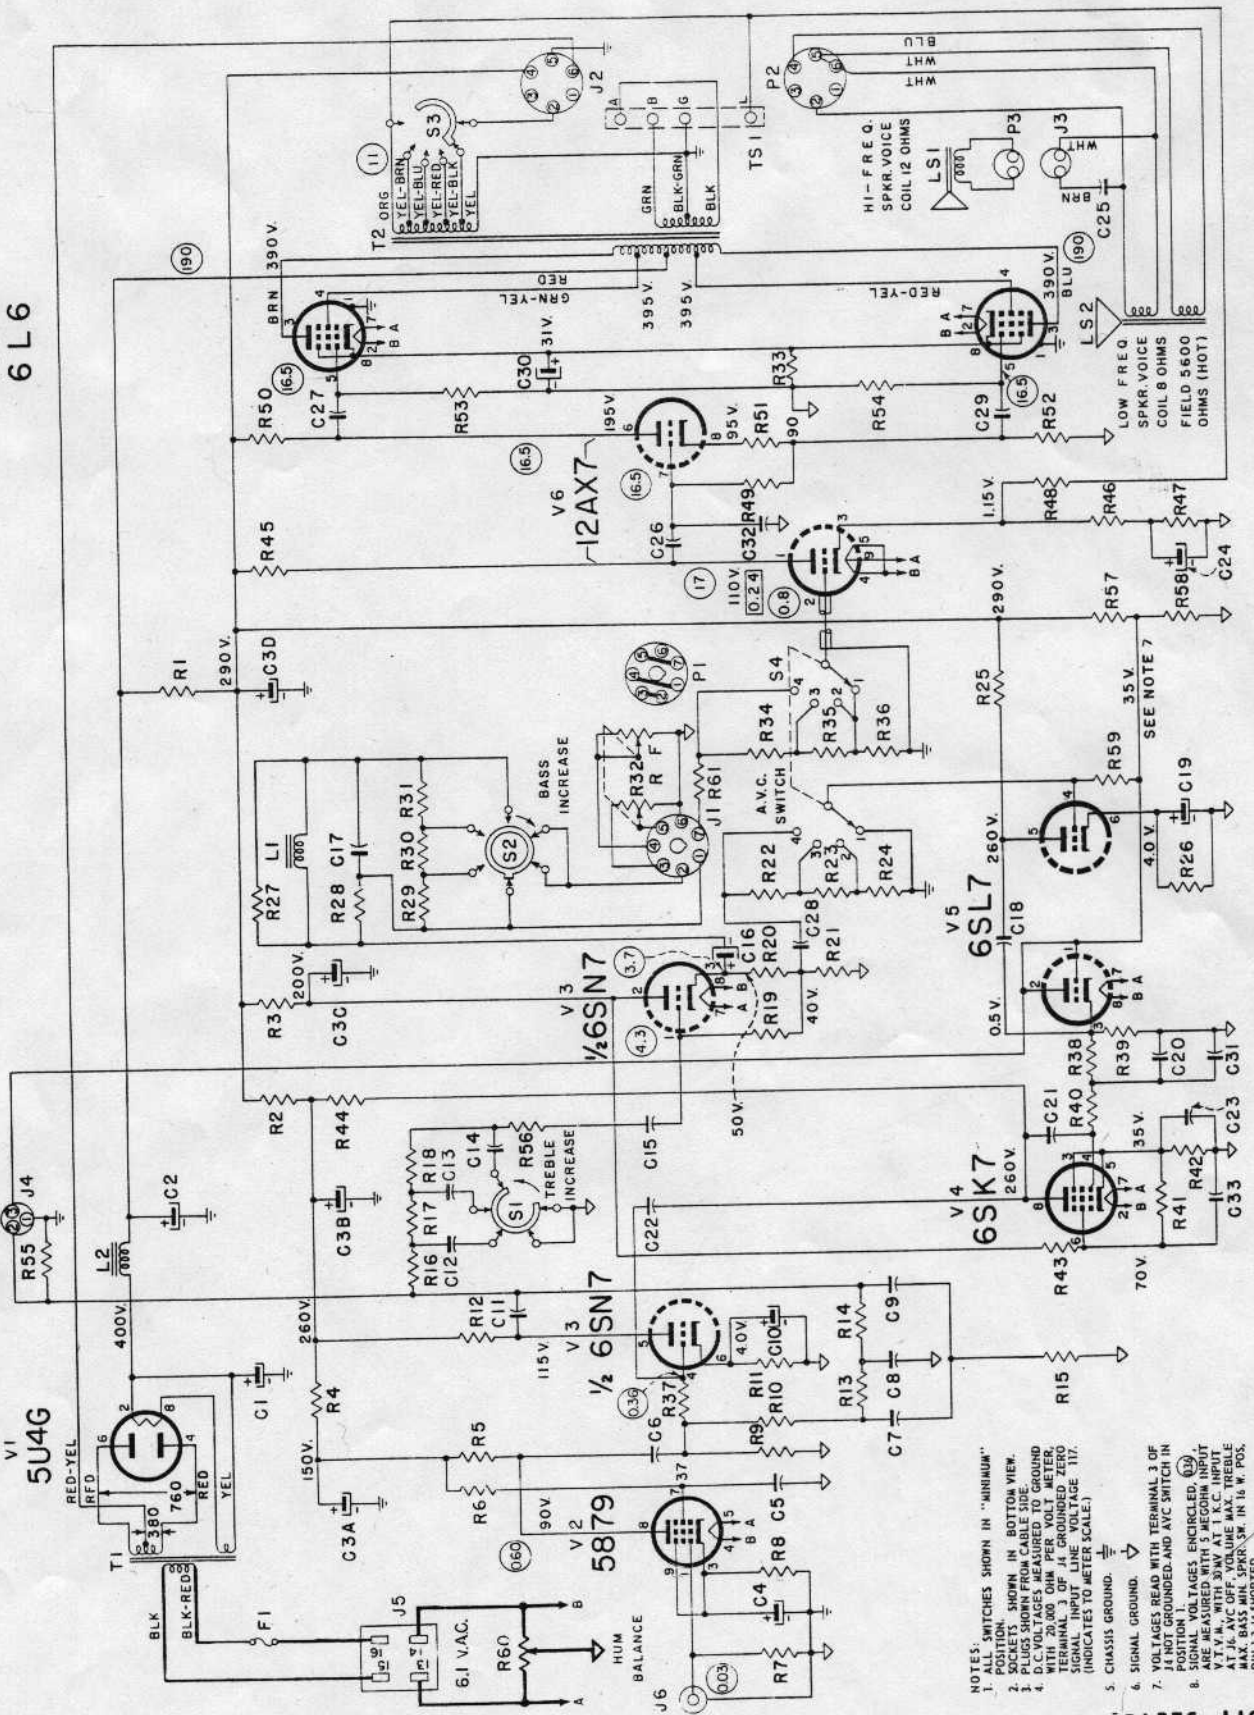

- NOTES: SWITCHES SHOWN IN "MINIMUM" POSITION.
1. SOCKETS SHOWN IN BOTTOM VIEW.
 2. PLUGS SHOWN FROM CABLE SIDE.
 3. D.C. VOLTAGES MEASURED WITH D.C. METER.
 4. D.C. VOLTAGES MEASURED WITH D.C. METER.
 5. TERMINAL 3 OF J4 GROUNDING ZERO SIGNAL INPUT LINE VOLTAGE 117. (INDICATES TO METER SCALE)
 6. CHASSIS GROUND.
 7. SIGNAL GROUND.
 8. VOLTAGES READ WITH TERMINAL 3 OF J4 NOT GROUNDING AND AVC SWITCH IN "ON" POSITION.
 9. SUGGESTION VOLTAGES ENCLOSED. (6.9) ARE MEASURED WITH 5 MEGOHM INPUT V.T.V.M., WITH 30W AT 1 K.C. INPUT AT J6. AVC OFF. VOLUME IN 15 W. POS. PIN 1-3 J4 SHORTED.

PARTS LIST
on Reverse Side

